

# Termination SMA

## ANNE-50+

50

DC to 18000 MHz



### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

### Features

- wideband coverage, DC to 18000 MHz
- return loss, 35 dB typ. up to 4000 MHz and 27 dB typ. 10000 to 18000 MHz
- rugged construction

### Applications

- cellular communications
- satellite communications
- test set-up
- defense & radar


CASE STYLE: LL561

Connectors	Model	Price	Qty.
SMA-Male	ANNE-50+	\$9.95 ea.	(1-9)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

*The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.*

### Outline Drawing

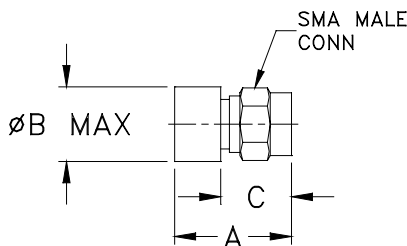

### Outline Dimensions (inch/mm)

A	B	D	wt
0.58	0.37	0.35	grams
14.73	9.40	8.89	4.0



To order ANNE-50+ with 3½ length chain and end coupling with .130" diameter mtg. hole, use part no. ANNE-50CN+. Price is \$11.95, Qty. (1-9)


### Electrical Specifications T<sub>AMB</sub>=25°C

FREQUENCY (MHz)	IMPEDANCE (OHMS)	RETURN LOSS (dB) MIN.				POWER RATING* (W)
		DC-4 GHz	4-8 GHz	8-12 GHz	12-18 GHz	
DC-18000	50	30	28	26	20	1.0

\*At 50°C, derate linearly to 350mW at 100°C.

### Typical Performance Data

Frequency (MHz)	Return Loss (dB)
100	51.21
596	46.64
1072	43.38
2024	38.95
2800	36.93
3400	35.82
4000	35.20
4800	34.92
6400	35.97
8000	40.29
10000	45.79
12000	34.97
14000	30.16
16000	27.19
18000	23.24

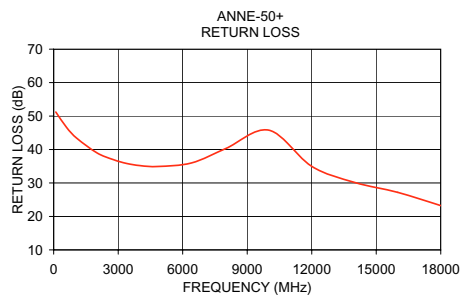

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. E  
M98898  
ANNE-50+  
ED-11192A  
070619